


Warranty

All American Bass speaker are guaranteed to be free and void of defects due to manufacturer's faults for 1 year from date of purchase. All claims must be made at the place of purchase, and accompanied with the sales receipt.

WARNING: American Bass speaker are capable of producing sound levels that can permanently damage your hearing! turning up a system to a level that has audible distortion is more damaging to your ears than listening to an un-distorted system at the same volume level. The threshold of pain is indicator that the sound level is too loud and may damage your hearing. Please use common sense when controlling volume.

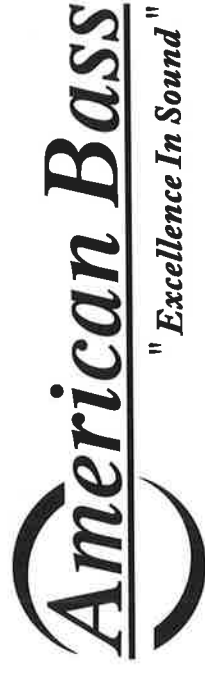

440 248 5858

www.americanbassusa.com


**31200 SOLON ROAD, SUITE 18 , SOLON , OHIO 44139
USA**

Congratulations! thank you for choosing American Bass speakers. We are proud to introduce these exciting new lines of outstanding performance products. Our engineering team utilizes innovative technology to bring you the absolute best performance, sound quality, reliability, and value

GODZILLA SERIES SUBWOOFER

Features:

- Green textured finish die-casting basket
- Carbon cone foam surround
- 3.5" 4-layer high temperature resistant Flat wire voice coil
- Carbon fiber dust cap
- Triple stacked high energy 425 Oz magnets
- Direct cooling design T-yoke with black anodized treatment
- Double black spider with mirrored layout
- 4GA copper push terminal

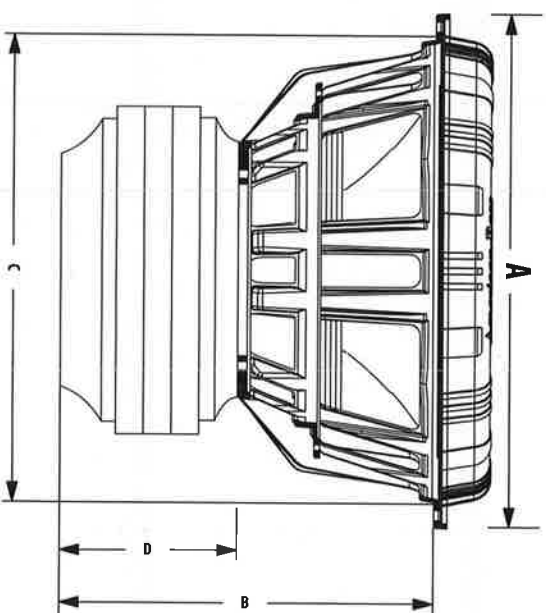

Model	A	B	C	D
GODZILLA-12	330mm	245mm	288mm	130mm
GODZILLA-15	395mm	280mm	350mm	130mm
GODZILLA-18	465mm	308mm	426mm	130mm

Technical Data/Specification

Model	GODZILLA		GODZILLA		GODZILLA	
	12D1	12D2	15D1	15D2	18D1	18D2
Voice Coil Diameter(mm/inch)	89/3.5	89/3.5	89/3.5	89/3.5	89/3.5	189/3.5
Impedance Ohm	Dual 1	Dual 2	Dual 1	Dual 2	Dual 1	Dual 2
Re Ohm	2	4	2	4	2	4
FS Hz	37	36.72	31.88	49.28	27.7	30.3
Sd	490	490.8	774.3	498.76	1.182K	1.182K
Md g	150	150	200	300	250	250
BL	26	38.2	32.5	27	35	32.59
Qms	6.79	5.19	7.7	5.66	5.19	4.99
Qes	0.46	0.49	0.41	0.69	0.37	0.56
Qts	0.43	0.45	0.39	0.64	0.34	0.504
No	0.093	0.07	0.14	0.07	0.259	0.33
SPL dB	81.7	81	83.8	80.7	86.2	87.3
Vas L	8.7	8.1	19.54	6.3	47.12	69.9
Cms	25.67	23.8	22.95	17.89	23.75	35.24
Krm	119.1	95.81	99.8	45.194	93.01	163.8
Ermm	0.619	0.679	0.639	0.65	0.65	0.61
MMS g	720.6	788.9	1.085K	582.9	1.390K	781.03
MMd	714.4	782.6	1.073	576.5	1.366	757.6
Kxm	119.1	223.6	179.34	94.9	213.4	187
Exm	0.61	0.67	0.6	0.61	0.58	0.65
Xmax mm	22.5	22.5	22.5	22.5	22.5	22.5
Rms Power(Watts)	4700	4700	4700	4700	4700	4700
Max Power(Watts)	12000	12000	12000	12000	12000	12000