
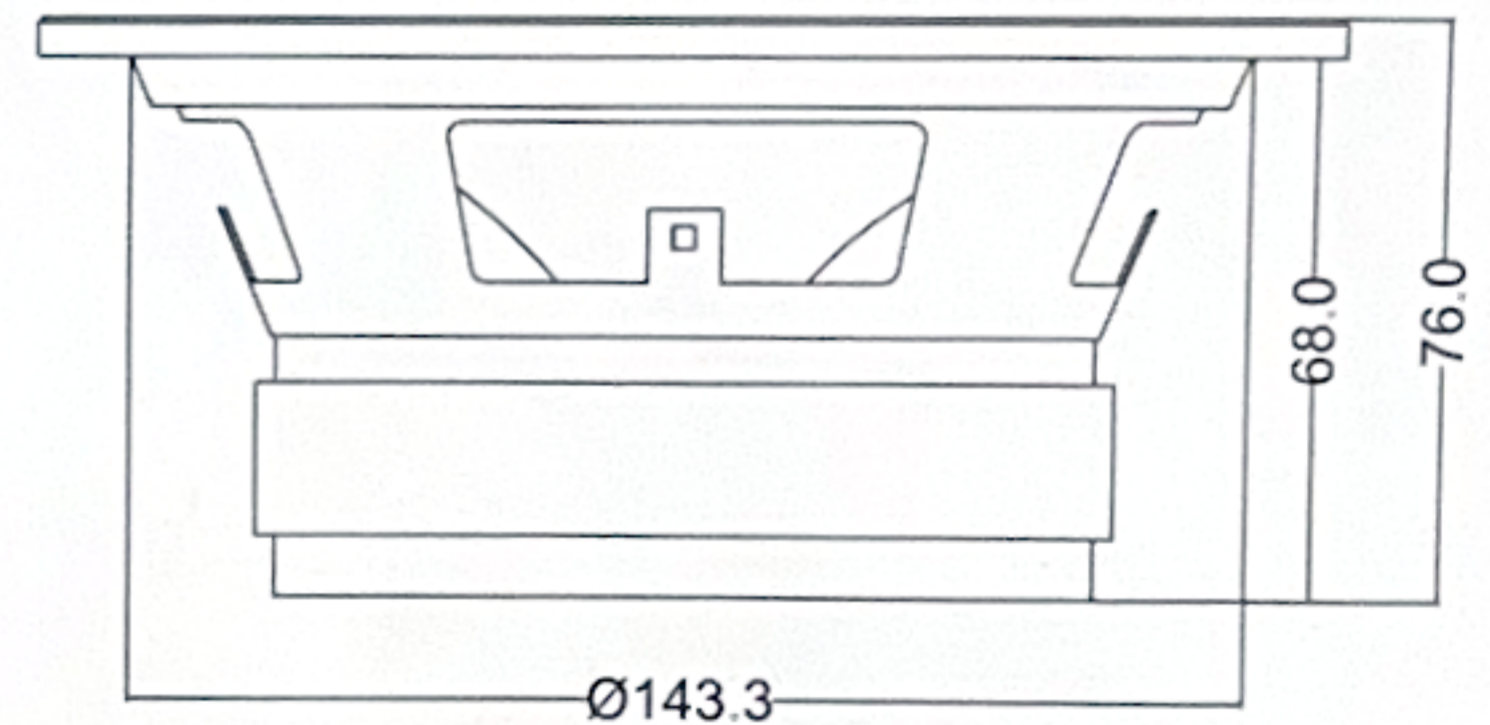


**HAWK-6.5**  
 Professional Midrange Speaker

**HAWK SERIES**

**Midrange Speaker 6.5"**

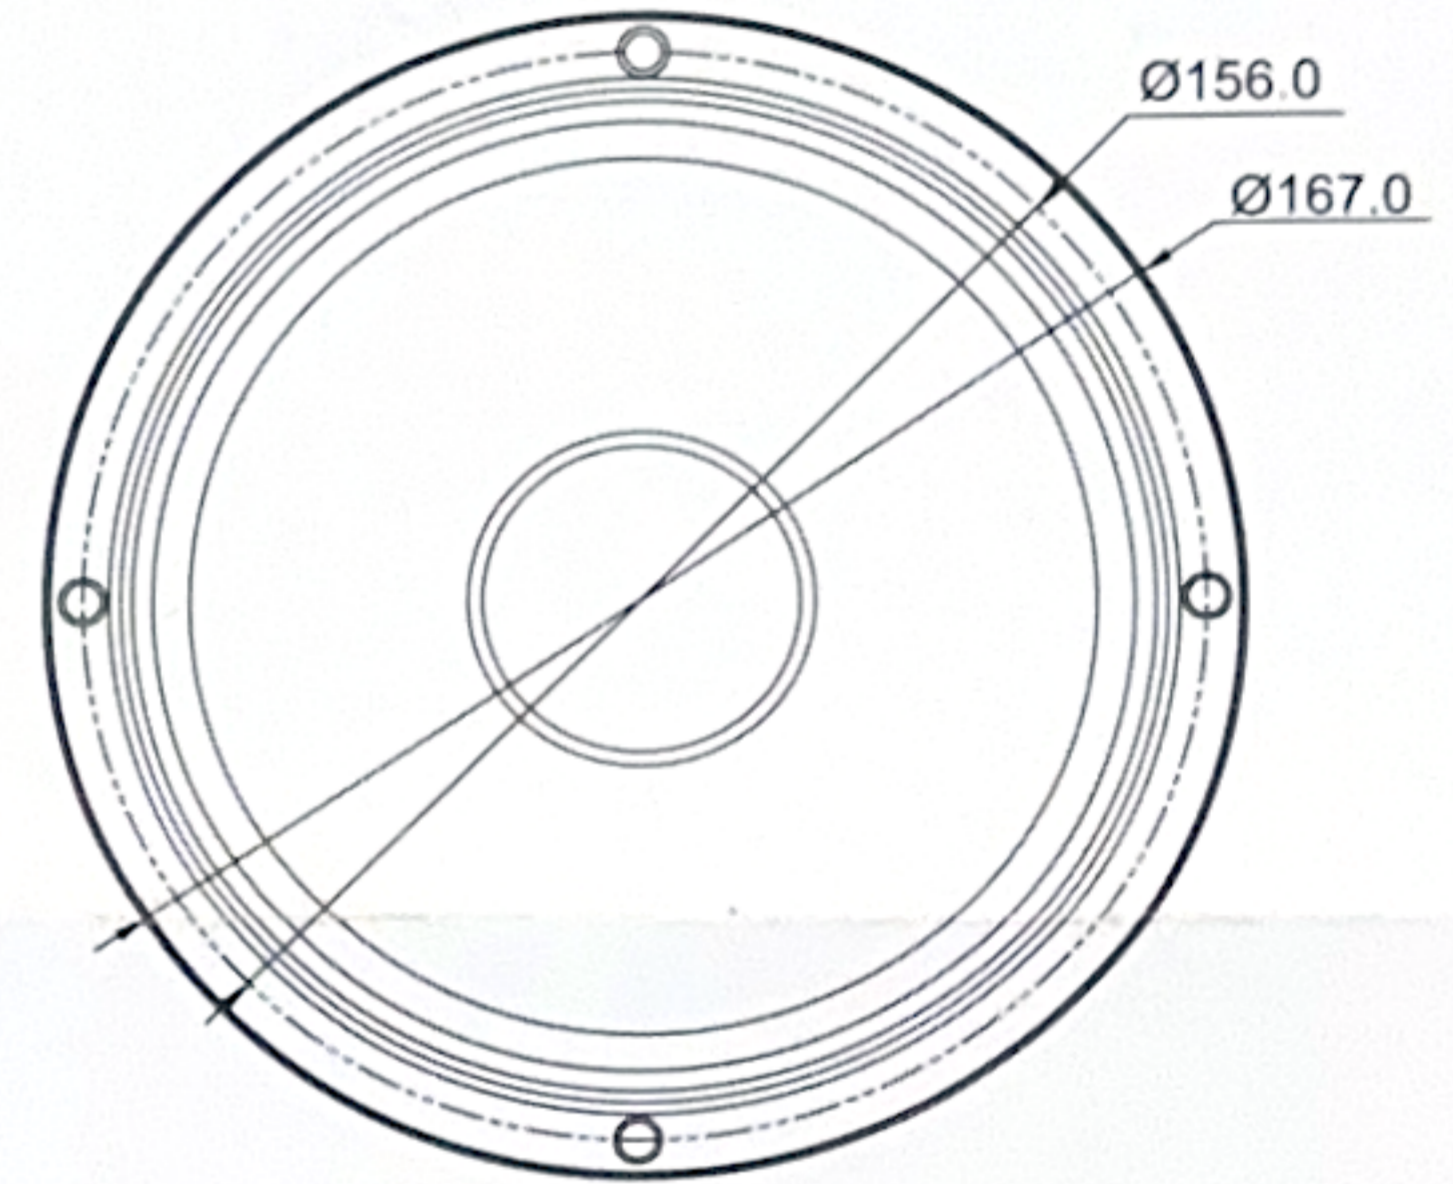

GENERAL SPECIFICATIONS

Nominal Diameter	6.5"
Frame Material	Stamp Steel Basket
Power Handling	500 Watts Max
Magnet	High Grade Y35 Ferrite Magnet
Voice Coil	1.5" CCAW, High Temp Voice Coil
Impedance	4 Ohms
Sensitivity	95 dB/m/w
Response Range	120 Hz to 10000 Hz

THIELE-SMALL PARAMETERS

Equivalent Volume	Vas	3.26 L
Free Air Resonance	Fs	133 Hz
Mechanical Factor	Qms	7.38
Electrical Factor	Qes	0.61
Total Factor	Qts	0.51
Cone Area	Sd	122.72 cm <sup>2</sup>
Mechanical Mass	Mms	9.28 g
Bl Factor	BL	7.53 Tm
Dc Resistance	Re	3.20 Ohms
Mechanical Mass Without Air	Mmd	8.50 g
Mechanical Compliance	Cms	152.41 mm/N

MOUNTING INFO

Overall Diameter	(167.0 mm / 6.5 inch)
Front Mount Baffle Cutout	(143.3 mm / 5.6 inch)
Mounting Depth	(68.0 mm / 2.7 inch)
Overall Depth	(76.0mm / 3.0 inch)

