
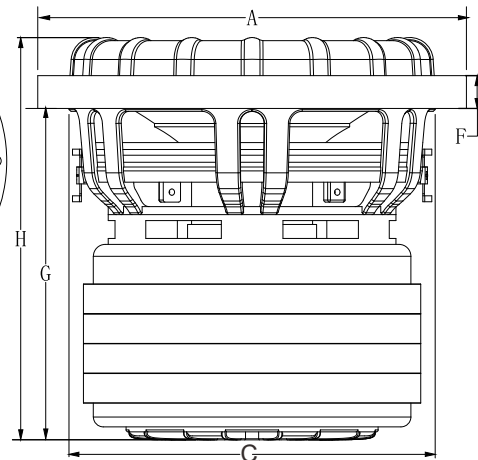


GODZILLA 8D2/D4

8" SUBWOOFER

GODZILLA 8D2/D4 FEATURES AND SPEC.

Robust die cast basket with green finish;
Carbon fiber enhanced non-press paper cone,
rigid and light to get best sounding;
Ribbed foam surround for less distortion;
2.5" 4-layer high temp. voice coil to handle more power;
Triple poly-cotton spiders for linear excursion;
Quad strontium 45oz magnets (180oz);
1-pc tech no energy loss T-yoke design;
Back plate aluminum plate on motor as heatsink;
In-pole piece alu pole to decrease inductance;
Rubber gasket;
Dual 2ohm and 4ohm impedance;
1200W RMS power and 2400W MAX power;



Dimensions	G O D Z I L L A 8 D 2 / D 4	
Dimensions	mm	Inch
Diameter A	216	8.50
Diameter B	196	7.62
Diameter C	186	7.32
Depth F	16.5	0.65
Depth G	164	6.46
Depth H	198	7.80

GODZILLA 8D2/D4 T/S PARAMETERS

	Imp	Dcr	Fs	SD	BL	Qms	Qes	Qts	SPLo	Vas	Cms	Mms	Mmd	Xmax	Vd
Model	ohm	ohm	Hz	msqM	Tm				dB	L	µm/N	g	g	±mm	L
GODZILLA 8D2	1	0.9	43.593	19.60	11.279	5.213	0.329	0.309	82.8	3.658	67.239	188.089	186.536	11	3.03
GODZILLA 8D2	4	3.6	43.593	19.60	22.342	5.797	0.386	0.362	82.7	3.602	67.118	186.618	185.063	11	3.03
GODZILLA 8D4	2	1.7	44.987	19.60	15.617	4.951	0.365	0.339	82.2	3.472	64.711	177.381	175.827	12.5	3.03
GODZILLA 8D4	8	6.8	44.635	19.60	30.491	5.454	0.403	0.376	82.3	3.382	64.952	182.234	180.679	12.5	3.03

*Above parameters are tested after each subwoofer is break-ined under 1000W power for 3 hours.

*Due to continuous pursuit of quality and performance, specifications change without prior notice.